



attiva 6L.5



48 VOLT CON SISTEMA AC


8 X 6V BATTERIE PB/ACIDO

205/50-10 CON CERCHI IN
ALLUMINIO

LUCI ANTERIORI E POSTERIORI

FRENI IDRAULICI SULLE 4
RUOTE + FRENO A MANO

ITALCAR INDUSTRIAL SRL | Via Bruino, 36 | 10040 Rivalta di Torino (TO)
Tel. +39 011 9040225 | Fax +39 011 9032986 | info@italcar.com | www.italcar.com



ITALCAR è un marchio Italiano

attiva 6L.5

posti:	6 (4 +2)
batterie:	8 x 6V, US2200 standard
motore:	AC 48V – Mahle Letrika
controllo:	sevcon GEN4 – AC – 450A
trasmissione:	trazione posteriore, 19 denti, ratio 12,31:1
sterzo:	a cremagliera di tipo automobilistico
prestazioni:	
velocità massima suggerita	30 km/h
autonomia	80 km
pendenza superabile (max)	25%
dimensioni:	
veicolo	3700mm x 1200mm x 1800mm
altezza da terra (a vuoto):	210mm
raggio di sterzata:	4 mt
interasse	2400mm
telaio:	in acciaio galvanizzato con verniciatura a polvere
carrozzeria:	PP impregnato e verniciato
sospensioni:	
anteriori	sospensioni indipendenti
posteriori	balestre con ammortizzatori idraulici
freni:	ad azionamento idraulico sulle 4 ruote con circuito sdoppiato
anteriori	disco
posteriori	tamburo
pneumatici:	205 / 50 – 10 con cerchione di alluminio
pressione di gonfiaggio:	1,7 bar (25psi)
carica batterie:	in dotazione al veicolo - 48v, 220/230V
dotazioni di serie:	include: avvisatore acustico di retromarcia, cruscotto digitale, luci anteriori e posteriori, clacson, indicatori di direzione, specchietti retrovisori laterali, parabrezza in plexiglass

Tutti i dati riportati sono indicativi e non vincolanti
la ITALCAR INDUSTRIAL S.r.l. si riserva il diritto di apportarvi qualsiasi variazione senza alcun preavviso



clicca mi piace - like us on



segui su - follow us on





attiva 6L.5



48 VOLT WITH AC SYSTEM
8 X 6V LEAD-ACID BATTERIES
205/50-10 ALUMINUM RIMS
FRONT & REAR LIGHTS
HYDRAULIC BRAKES ON 4
WHEELS + HANDBRAKE

ITALCAR INDUSTRIAL SRL | Via Bruino, 36 | 10040 Rivalta di Torino (TO)
Tel. +39 011 9040225 | Fax +39 011 9032986 | info@italcar.com | www.italcar.com




ITALCAR an Italian Brand



attiva 6L.5

places:	6 (4 +2)	
batteries:	8 x 6V, US2200 standard	
motor:	AC 48V – Mahle Letrika	
controller:	sevcon GEN4 – AC – 450A	
transmission:	rear axle, 19 spline, ratio 12,31:1	
steering:	self compensating single reduction rack and pignon	
performances:		
suggested max speed	30 km/h	
range	80 km	
max hill climbing ability	25%	
dimensions:		
overall	3700mm x 1200mm x 1800mm	
ground clearance (empty):	210mm	
turning radius:	4 mt	
wheel base	2400mm	
chassis:	galvanized steel frame and powder coated	
body:	PP impregnated and painted	
suspensions:		
front	Independent suspensions	
rear	leaf springs with hydraulic shock absorbers	
brakes:	automotive types, double hydraulic circuit on four wheel with hand brake	
front	Disc	
rear	drum	
tyres:	205 / 50 – 10 with aluminium rims	
recommended pressure:	1,7 bar (25psi)	
battery charger:	included with the vehicle - 48v, 220/230V	
basic configuration:	Includes: reverse buzzer; digital speedometer, front and rear lights, horn, direction indicators, rear-view mirrors, one piece plexiglass	

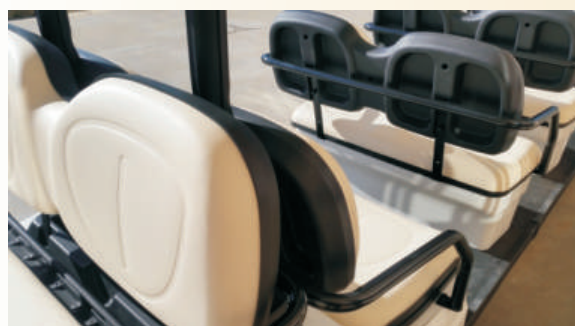

clicca mi piace - like us on



segui su - follow us on



All above specification were correct at the time of the printing and are considered indicative and not binding. ITALCAR INDUSTRIAL S.r.l. maintains the right to bring any changes without notice